

FUME EXTRACTOR ARMS

- An extractor arm extracts smoke, dust and gases directly at the source, before the contamination has spread in the premises and been inhaled
- Superior extraction arm and advanced design "Parallelogram" counter balancing system that eliminates the need for continual adjustment of friction joints and allows for an unparalleled ease of movement
- Ideal solution for most "source-capture" applications and specifically recommended for applications requiring an "easy to position" extractor that does not require constant adjustment
- Compact and smooth design, clearance of 1m (50") required
- **5-year limited warranty**



Flexi construction: Internal supporting mechanism made of mild steel tubing, 3 spring-assisted joints to provide precise counterbalancing of the extractor's inner and outer arm. Comes with a black baked-on enamel steel hood w/ optimized airflow and ring handle, and built in damper and with black baked-on enamel wall bracket. Motor and fan not included.

EXTRACTOR ARMS

Description	Flexi I, 6.5" dia Model No.	Mfg. No.	Price /Each	Flexi II, 8" dia Model No.	Mfg. No.	Price /Each
7' (2 m) Extractor Arm w/Wall Bracket	BA660	P-007		BA978	P-143	
10' (3 m) Extractor Arm w/Wall Bracket	BA661	P-008		BA979	P-144	
14' (4 m) Extractor Arm w/Wall Bracket	BA662	P-009		BA980	P-145	
17' (5 m) Extractor Arm w/Wall Bracket	BA663	P-010		BA985	P-146	



H MAX F SERIES COMBOS

- Boom and extractor arm combos
- Combos specially developed for welding, mixing of chemicals, grinding, and other applications when you need to reach over long distances
- Hoses are made of flame proof PVC with internal steel spiral
- Comes with Super-Flex® horizontal arm with ball bearing, extractor arm, hood with ring handle and built-in damper, wall bracket, hose and hood
- Fan and motor not included



H MAX F SERIES COMBOS

Description	Model No.	Price /Each
20' Boom & Extractor Arm Combo	BA675	
24' Boom & Extractor Arm Combo	BA678	
28' Boom & Extractor Arm Combo	BA680	

WALL FLEX & WALL FLEX ECO

NEW SELF-CLEANING UNIT NOW AVAILABLE

- Used to "at-Source" capture and filter a variety of airborne contaminants such as fumes, dust and gases
- Recognized as an excellent solution for the specific demands filtering source captured contaminants, the wall flex comes complete with a cleanable or self-cleaning filter and fan




CONSTRUCTION:

- Unit made of powder coated 12-14-16 ga. sheet steel
- Fan 0.75 kW (1HP), 120 V, 1-phase, 2400 m³/hr (1450 CFM) free-blowing
- Capacity: 1250 m³/hr (730 CFM) (With extraction arm)
- Standard with 1-prefilter and 1 washable 99% main filter (99.5% @ .5 micrometers)
- Complete with ON/OFF motor starter and overload protection
- 3.5 m (12') cable and plug
- Reverse Pulse-Jet filter cleaning units include:
 - Spark-proof impeller
 - Motor out of the air stream
 - Removable dust drawer
- **5-year limited warranty**
- **Always refer to owners manual before operating this type of equipment**

FEATURES & BENEFITS:

- "All Steel design" (not including hose) - No plastic to bend, melt or otherwise lose shape & deform
- Compact wall mount design - Saves on floor space
- Washable or self-cleaning filters - Avoid high cost replacement filters
- Available w/pulse jet filter cleaning system - Save on time required to clean the filters

Arm not included

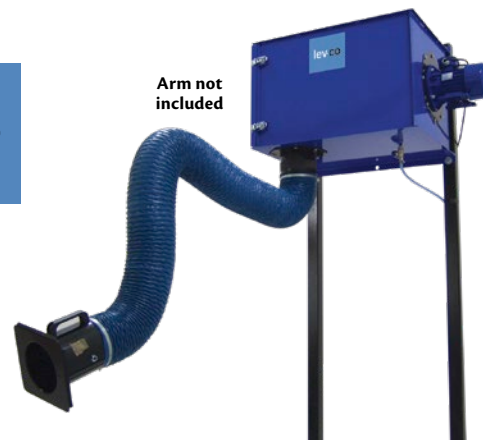

Model No.	Mfg No.	Description	Price /Each
BA697	P-026/P-149/115V/1PH	Wall Mounted Filter w/115/1/60; 1.5 HP Fan	
BA657	P-160	Replacement Filter Cartridge for BA697 , BA698 and BA699 (Cleanable with compressed air)	
BA659	P-160-W	Replacement Filter Cartridge for BA697 , BA698 and BA699 (Washable with soap and hot water... Suitable for oily smoke)	
EA454	P-541	Replacement Filter Cartridge for EA462 , EA463 and EA464 (Cleanable With Compressed Air) Prior 2013	
EA607	P-537	Replacement Filter Cartridge for BA655 (Cleanable With Compressed Air) Post 2013	